

AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT			1. CONTRACT ID CODE	PAGE OF PAGES
2. AMENDMENT/MODIFICATION NO. 2	3. EFFECTIVE DATE 16-Aug-2002	4. REQUISITION/PURCHASE REQ. NO.	5. PROJECT NO. (If applicable)	
6. ISSUED BY US Army Corps of Engineers, Kansas City District 760 Federal Building, 601 East 12th Street Kansas City, Missouri 64106-2896		7. ADMINISTERED BY (If other than item 6)		

8. NAME AND ADDRESS OF CONTRACTOR (No., street, county, State and ZIP Code)		(x) 9a. AMENDMENT OF SOLICITATION NO. DACW41-02-R-0014
		9B. DATED (SEE ITEM 11) 7/31/2002
		10A. MODIFICATION OF CONTRACT/ORDER NO.
		10B. DATED (SEE ITEM 13)
CODE	FACILITY CODE	

11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS

The above number solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers is extended, is not extended.

Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods:
(a) By completing Items 8 and 15, and returning ___ copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or telegraph which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.

12. ACCOUNTING AND APPROPRIATION DATA (If required)

13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS, IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.

<input checked="" type="checkbox"/> A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.
B. THE ABOVE NUMBER CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF:
C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:
D. OTHER (Specify type of modification and authority)

E. IMPORTANT: Contractor is not, is required to sign this document and return _____ copies to the issuing office.

14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.)

SEE ATTACHED

Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.

15A. NAME AND TITLE OF SIGNER (Type or print)		16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or print)	
15B. CONTRACTOR/OFFEROR	15C. DATE SIGNED	16B. UNITED STATES OF AMERICA	16C. DATE SIGNED
(Signature of person authorized to sign)		BY (Signature of Contracting Officer)	

1. SOLICITATION NO. DACW41-02-R-0014 is amended as follows:

a. SPECIFICATIONS:

SUMMARY OF CHANGES

Narrative Changes:

Section 00800 - Special Contract Requirements

52.211-10 COMMENCEMENT, PROSECUTION, AND COMPLETION OF WORK (APR 1984)

The Contractor shall be required to (a) commence work under this contract within 10 calendar days after the date the Contractor receives the notice to proceed, (b) prosecute the work diligently, and (c) complete the entire work ready for use not later than **365** calendar days from contractor's acknowledgement of notice to proceed. The time stated for completion shall include final cleanup of the premises.

Section 00800 - Special Contract Requirements

52.211-12 LIQUIDATED DAMAGES--CONSTRUCTION (SEP 2000)

Liquidated Damages is changed to **\$580.00** per day.

Section 00800 - Special Contract Requirements

New clause added.

FAR 52.236-1 PERFORMANCE OF WORK BY CONTRACTOR (APR 1984): The Contractor shall perform on the site, and with its own organization, work equivalent to at least 25% of the total amount of work to be performed under the contract. This percentage may be reduced by a supplemental agreement to this contract if, during performing the work, the Contractor requests a reduction and the Contracting Officer determines that the reduction would be to the advantage of the Government. (End of clause)

SECTION 01451-CONTRACTOR QUALITY CONTROL

3.4.2 CQC System Manager

The Contractor shall identify as CQC System Manager an individual within the onsite work organization who shall be responsible for overall management of CQC and have the authority to act in all CQC matters for the Contractor. **The CQC System Manager shall be a graduate engineer, graduate architect, or a graduate of construction management, with a minimum of 3 years construction experience on construction similar to this contract or a construction person with a minimum of 8 years in related work.** This CQC System Manager shall be on the site at all times during construction and shall be employed by the prime Contractor. **The CQC System Manager shall be assigned as System Manager but may have duties as project superintendent in addition to quality control.** An alternate for the CQC System Manager shall be identified in the plan to serve in the event of the System Manager's absence. The requirements for the alternate shall be the same as for the designated CQC System Manager.

New Section SECTION 01530 SIGNS. A copy of the new section is attached.

2. Proposals are required to acknowledge receipt of this amendment on the Proposal Form, in the space provided, or by separate letter or telegram prior to opening of Bids. Failure to acknowledge all amendments may cause rejection of the bid.

3. Proposals will be due at 10:30 am, local time at place of receipt of proposals, 3 September 2002, in Room 748 Federal Building, 601 E. 12th Street, Kansas City, Missouri 64106-2896.

SECTION 01530

SIGNS

PART 1 GENERAL

1.1 GENERAL

The items furnished under this section shall be maintained in good condition throughout the construction period. The items furnished shall remain the property of the Contractor and shall be removed from the site upon completion of the work.

PART 2 PRODUCTS

2.1 SAFETY SIGN

One safety sign shall be constructed in accordance with the attached standard drawing.

PART 3 EXECUTION

3.1 INSTALLATION OF SAFETY SIGN

One safety sign shall be provided at the directed location.

-- End of Section --

SAFETY PERFORMANCE SIGN

Each contractor's safety record is to be posted on Corps managed or supervised construction projects and mounted with the construction project identification sign.

The graphic format, color, size and typefaces used on the sign are to be reproduced exactly as specified below. The title with First Aid logo in the top section of the sign and the performance record captions are standard for all signs of the type. Legend Groups 2 and 3 below identify the project and the contractor and are to be placed on the sign as shown.


Safety record numbers are mounted on individual metal plates and are screw mounted to the background to allow for daily revisions to posted safety performance record.

Legend Group 1: Standard two-line title "Safety is a Job requirement" with (8 od.) Safety Green First Aid logo.
Color: to match PMS 347
Typeface: 3" Helvetica Bold
Color: Black

Legend Group 2: One to two-line project title legend describes the work being done under this contract and name of host project.
Color: Black
Typeface: 1.5" Helvetica Regular
Maximum line length: 42"


Legend Group 3: One to two-line identification; name of prime contractor and city, state address.
Color: Black
Typeface: 1.5" Helvetica Regular
Maximum line length: 42"

Legend Group 4: Standard safety record captions as shown.
Color: Black
Typeface: 12.5" Helvetica Regular

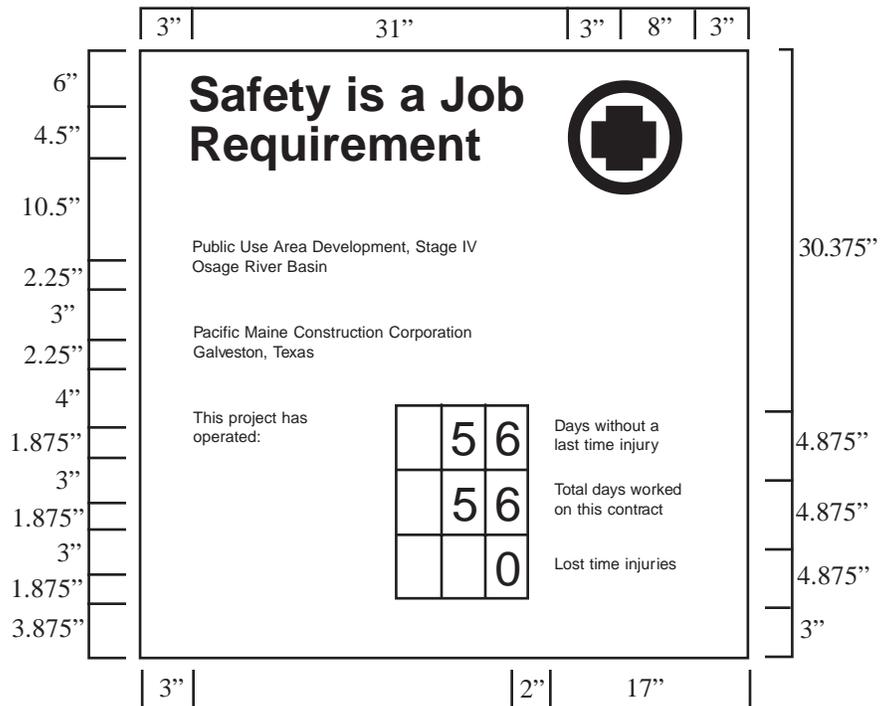

Sign Type	Legend Size	Panel Size	Post Size	Specification Code	Mounting Height	Color Bkg/Lgd
CID-02	Various	4' X 4'	4" X 4"	HDO-3	48"	WH/BK - GR

Replaceable numbers are to be mounted on white .060 aluminum plates and screw-mounted to background.
Color: Black
Typeface: 3" Helvetica Regular
Plate size: 2.5" X 5"

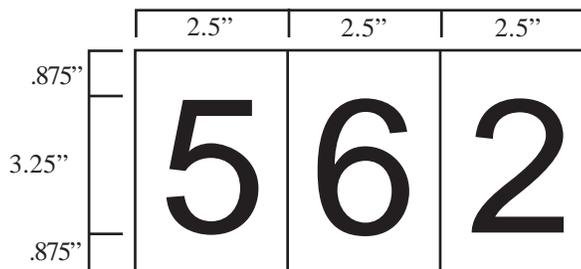

All typography is flush left and rag right. Upper and lower case with initial capitals only as shown. Letter - and word - spacing to follow Corps standards.

Fig. 2

All Construction Project Identification signs and Safety Performance signs are to be fabricated and installed as described below. The signs are to be erected at a location designated by the contracting officer and shall conform to size, format, and typographic standards.

The sign panels are to be fabricated from .75" High Density Overlay Plywood.

Sign graphics to be prepared on a white non-reflective vinyl film with positionable adhesive backing.

All graphics except for the Communications Red background with Corps signature on the project sign are to die-cut or computer cut nonreflective vinyl, pre-spaced legends prepared in the sizes and typefaces specified and applied to the background panel following the graphic formats shown.

The 2' x 4' Communications Red panel (to match PMS-032) with full Corps signature (reverse version) is to be screen printed on the white background identification of the District / Division may be applied under the signature with white cut vinyl letters prepared to Corps standards


Drill and insert six (6) .375 T-nuts from the front face of the HDO sign panel. Position holes as shown. Flange of T-nut to be flush with sign face

Apply Graphic panel to prepared HDO plywood panel following manufactures instructions

Sign uprights to be structural grade 4" x 4" treated Douglas Fir or Southern Yellow Pine. No 1 or better. Post to be 12' long Drill six (6) .375" mounting holes in uprights to align with T-nuts in sign panel. Countersink (5") back of hole to accept socket head cap screw (4" x .375").

Assemble sign panel and uprights. Imbed assembled sign panel and uprights in 4' hole. Local soil conditions and/or wind loading may require bolting additional 2" x 4" structs on inside face of uprights to reinforce installation shown.

Shown below the mounting diagram is a panel layout grid with spaces provided for project information. Photocopy this page and use as a worksheet when preparing sign Legend orders.

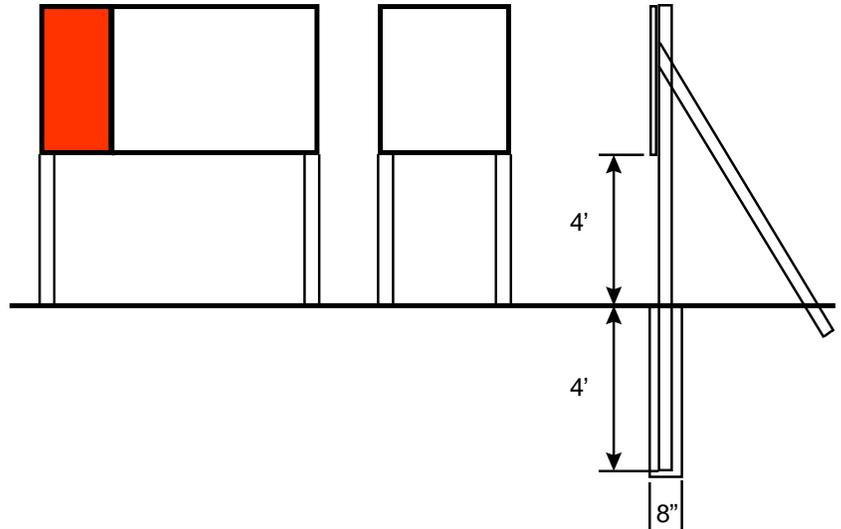

Construction Project Sign
Legend Group 1

- 1 _____
- 2 _____

Legend Group 2 Division/District Names

- 1 _____
- 2 _____

Legend Group 3 Project Title

- 1 _____
- 2 _____
- 3 _____

Legend Group 4 Facility Name

- 1 _____
- 2 _____

Legend Group 5a: Contractor/A&E

- 1 _____
- 2 _____
- 3 _____
- 4 _____
- 5 _____

Legend Group 5b: Contractor/A&E

- 1 _____
- 2 _____
- 3 _____
- 4 _____
- 5 _____

Safety Performance Sign
Legend Group 1: Project Title

- 1 _____
- 2 _____

Legend Group 2: Contractor/A&E

- 1 _____
- 2 _____